




진공 (Vacuum) 배관 자재

WE CREATE A BETTER FUTURE



NW (KF) & MF Component set

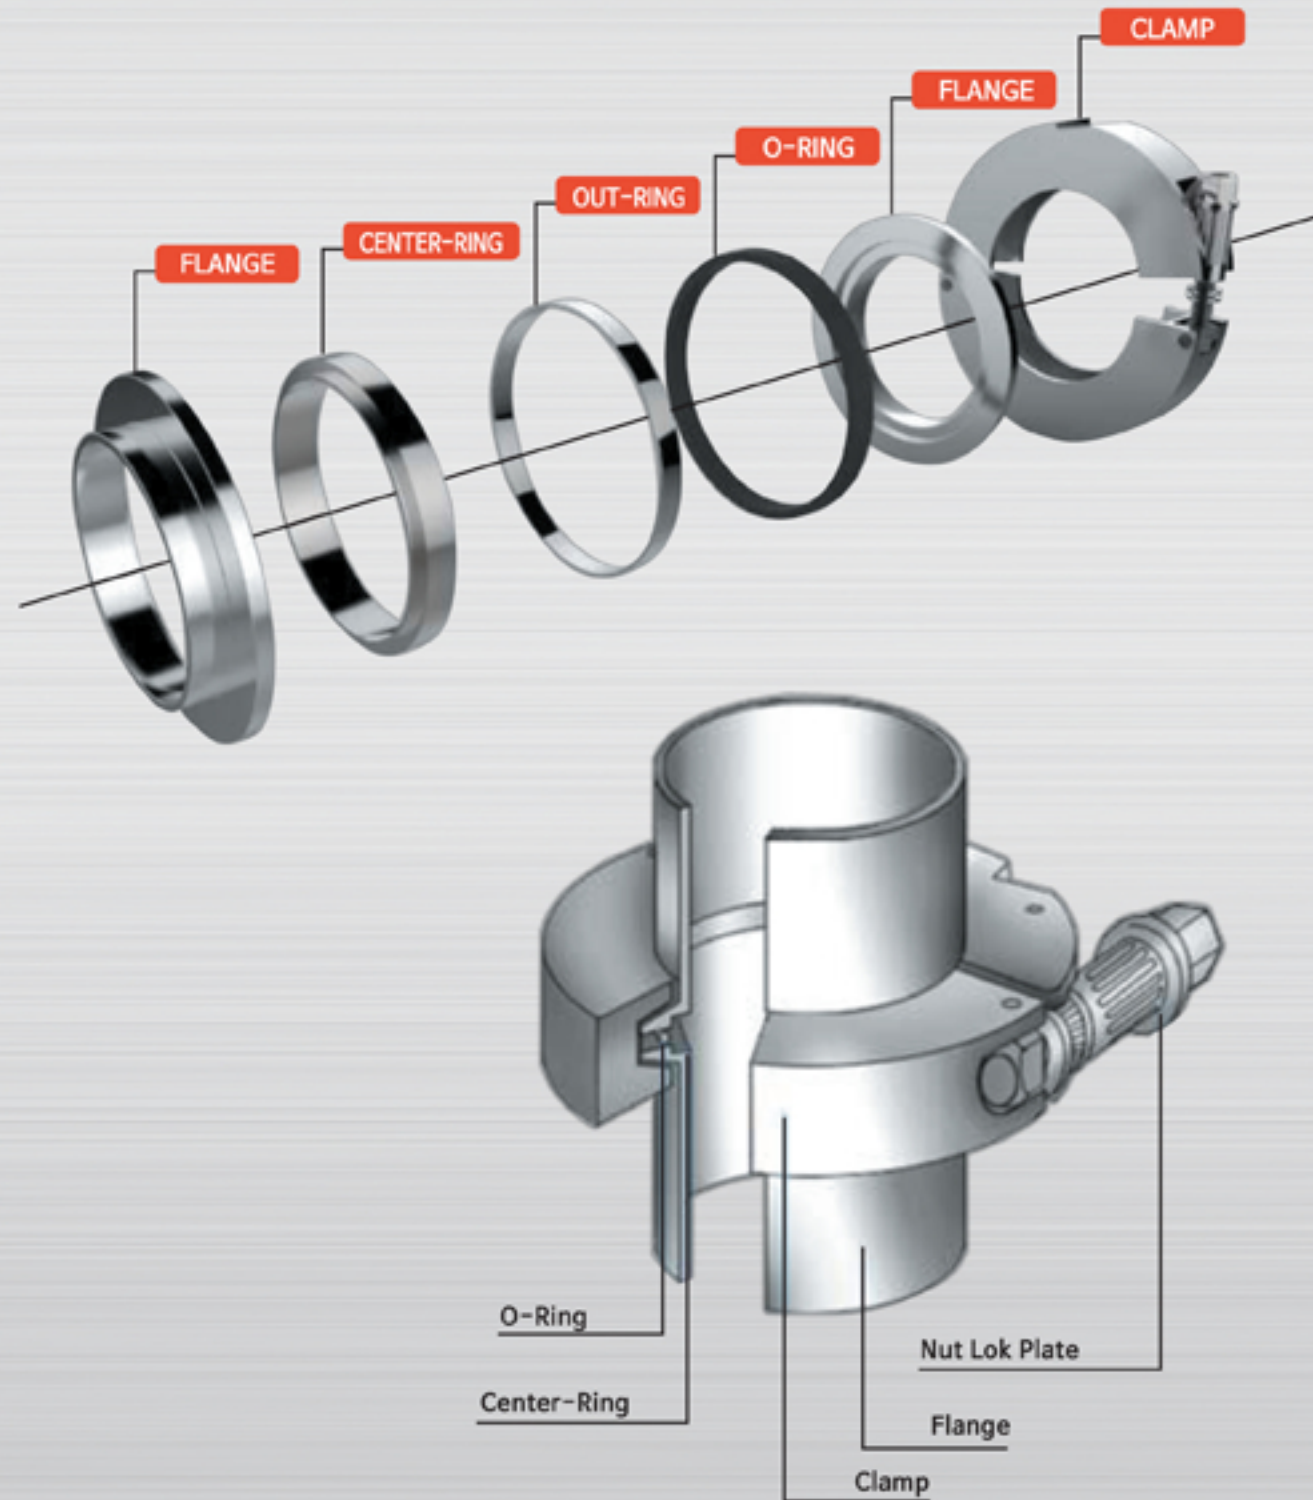

Bellows Assemblies



NW Flange Type




DC Flange Type



Tube End Type

진공 부품개발

Chamber-Pump
Pump-Scrubber
Scrubber-Duct

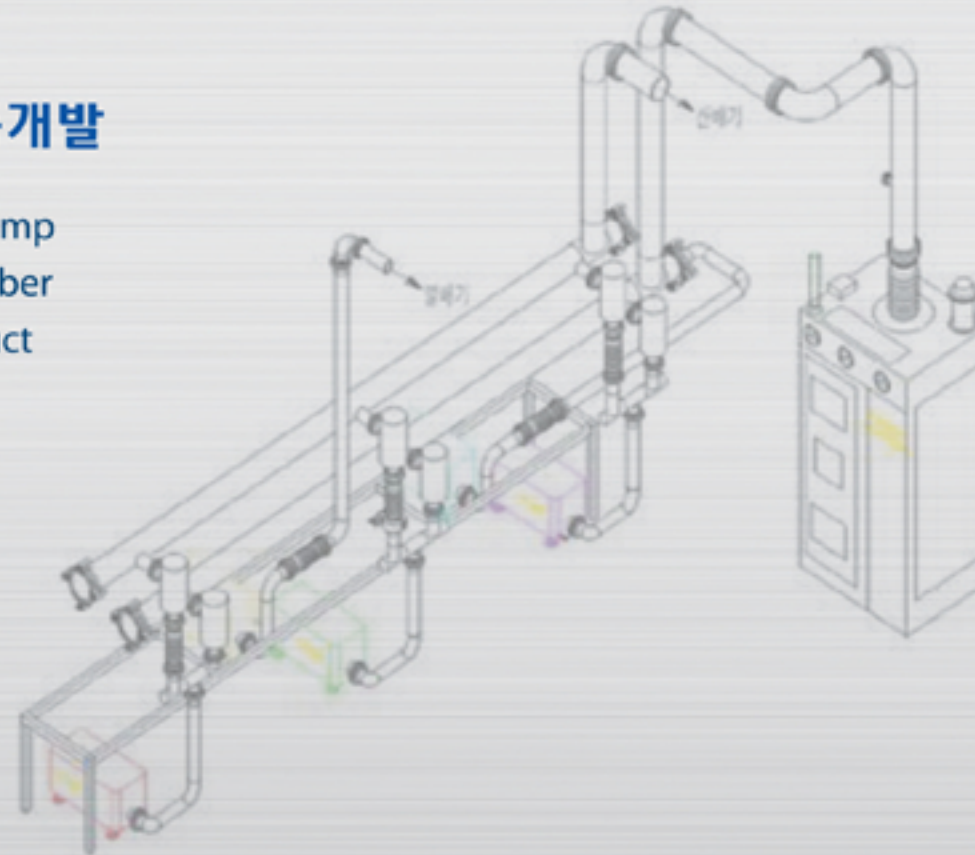

Clamp



고강도 NW25~50



M10 L36 & L46



M8 & M10 (A/L)



NW63~NW160 (A/L)



PRODUCT CONDENSED CATALOG





취급품목

고청정 배관자재

Valve
Regulator
Tube
Fitting



진공 배관자재

Clamp
Bellows
Flange
Center Ring + O-Ring + Out Ring



V82 Series Lowest Dead Volume Ball Valves

- Working Pressure : 3,000 psig
- Stainless Steel and Brass
- 2-way and 3-way actuation
- DK-Lok 1/16 to 3/4 in. OD
- Pipe thread 1/8 to 1/2 in.



DQ Series Quick Connectors

- Bi-directional Flow design
- Up to 3,000 psig
- Stainless Steel and Brass
- DK-Lok 1/8 to 1/2 in. OD
- Male/ Female 1/8 to 1/2 in. NPT

Swagelok 100% 호환



V81 Series Hex Ball Valves

- Lever, Butterfly, Color, Key-Lock handle
- Working pressure : 2,000 psi
- Stainless Steel and Brass
- DK-Lok 1/4 to 1 in. OD
- Pipe thread 1/4 to 1 in.



V15 Series Needle Valves
V16 Series Union Bonnet Valves

- Working Pressure : 6,000 psig
- Regulating / Vee / Soft Seat
- Stainless Steel, Brass, and Exotic Alloys
- DK-Lok 1/8 to 1 in. OD
- Pipe thread 1/8 to 1 in.



V63 / V66 Series Relief Valves

- Working Pressure : 6,000 psig
- Cracking pressure : 50 to 6,000 psig
- 18 to 400 °F (-28 to 204 °C)
- Stainless Steel with FKM seals
- Lok 1/4" ~ 1/2"
- Pipe thread 1/4" ~ 1/2"

Diaphragm Valves

- Material : sus316L
- Grade : EP, BA
- Size : 1/4" ~ 3/4"
- Max Working Pressure 1~23.5mpa



Gas Filter / Gasket Filter

- Material : sus316L, Hastelloy
- Grade : EP
- Removal Rating : >0.0025 μm
- Flow rate : 15~300 SLPM
- Size : 1/4" ~ 3/4"




Regulators

- Material : sus316L
- Grade : EP, BA
- Size : 1/4" ~ 1"
- Inlet pressure : 600 psi, 3500psi



Tube & Pipes

- Material : sus316L, sus304
- Grade : EP, BA, AP
- Size : 1/8" ~ 2", 15A ~ 200A

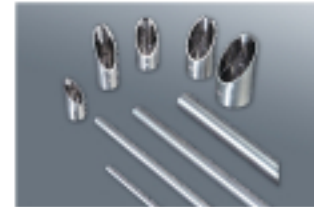

Bellows Valve

- Material : sus316L
- Grade : EP, BA
- Size : 1/4" ~ 1"



PRODUCT CONDENSED CATALOG



본사 : Tel. 031-372-9462 Fax. 031-372-9464

본사주소 : 경기도 오산시 삼미로47번길 11-8

E-mail: judis73@hotmail.com www.nmt21.co.kr

DK-Lok Tube Fittings
Stainless Steel, Brass Carbon Steel



VM Series Metering Valves



- Working Pressure : 2,000 psig for VM1D Series
- 1,000 psig for VM3D / VM6D Series
- Stainless Steel and Brass
- DK-Lok 1/16 to 3/8 in. OD
- Panel mount with no handle removal.

V33 Series Poppet Check Valves



- Working Pressure : 3,000 psig
- Cracking Pressure : 1/3 to 100psig
- Stainless Steel and Brass
- DK-Lok 1/8 to 1 in. OD
- Pipe thread 1/8 to 1 in.

V56 Series
Instrument Manifolds



- Working Pressure : 6,000 psig
- Vertical Direct / Remote mount
- Stainless Steel and Carbon steel
- 2, 3, and 5 valve as standard

VCR Fittings



- Material : sus316L
- Grade : EP, BA
- Size : 1/8" ~ 1"

Clean Weld Fittings



- Material : sus316L
- Grade : EP, BA
- Size : 1/8" ~ 1"

Coaxial Fittings



- Material : sus316L
- Grade : EP, BA
- Size : 1/4" ~ 1/2"

Pipe & Tube Fittings



- Material : sus316L, sus304
- Grade : EP, BA, AP
- Size : 1/8" ~ 2", 15A ~ 200A